

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069030 A2**(51) International Patent Classification<sup>7</sup>: **G02F 1/1335**(21) International Application Number: **PCT/CA02/00255**

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/271,563 27 February 2001 (27.02.2001) US(71) Applicant (for all designated States except US): **THE UNIVERSITY OF BRITISH COLUMBIA [CA/CA]**; Industry Liaison Office, Room 331 IRC Building, 2194 Health Sciences Building, Vancouver, British Columbia V6T 1Z3 (CA).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WHITEHEAD, Lorne [CA/CA]**; 3015 W. 12th Avenue, Vancouver, British Columbia V6K 2R4 (CA). **WARD, Greg [US/US]**; 149Commonwealth Drive, Menlo Park, CA 94025 (US). **STUERZLINGER, Wolfgang [AT/CA]**; 219 Glenforest Road, Toronto, Ontario M4N 2A3 (CA). **SEETZEN, Helge [DE/CA]**; 5432 Duquette, Montreal, Québec H4A 1J6 (CA).(74) Agent: **MANNING, Gavin, N.; OYEN WIGGS GREEN & MUTALA**, 480 - 601 West Cordova Street, Vancouver, British Columbia V6B 1G1 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), DE (utility model), DK (utility model), DM, DZ, EC, EE (utility model), ES, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: HIGH DYNAMIC RANGE DISPLAY DEVICES

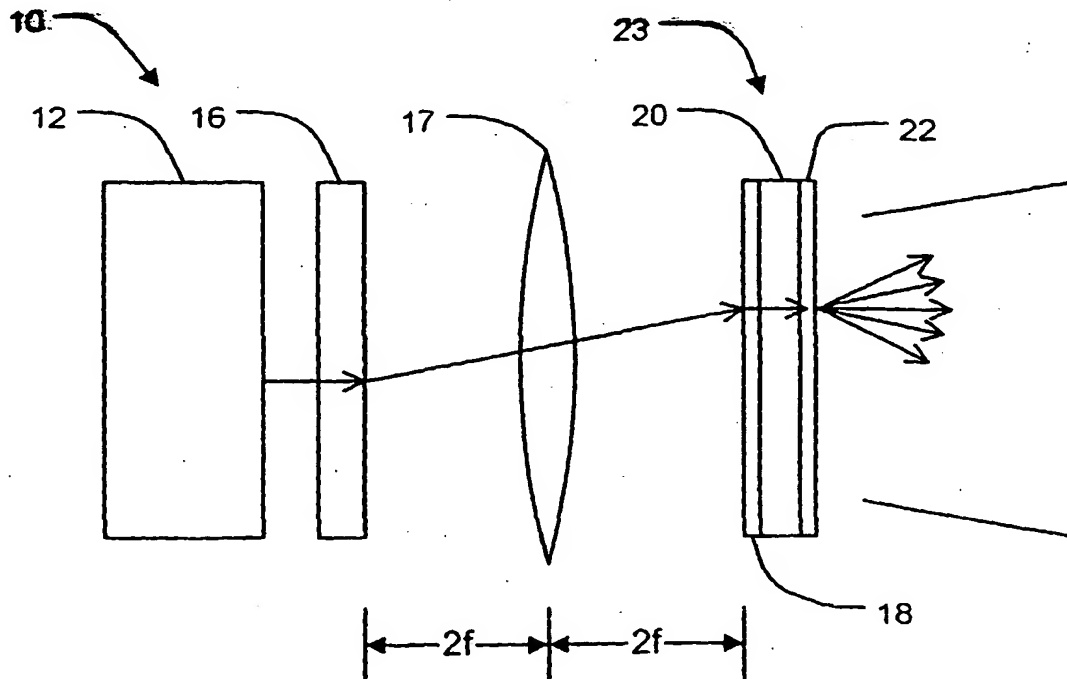

(57) Abstract: A display has a screen which incorporates a light modulator. The screen may be a front projection screen or a rear-projection screen. Elements of the light modulator may be controlled to adjust the intensity of light emanating from corresponding areas on the screen. The display may provide a high dynamic range.

WO 02/069030 A2

BEST AVAILABLE COPY

REF. 2 DOCKET PU020471  
CORRES. COUNTRY: CA  
COUNTRY: PCT



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

## HIGH DYNAMIC RANGE DISPLAY DEVICES

### Cross Reference to Related Applications

- [0001] This application claims the benefit of the filing date of  
5 U.S. patent application No. 60/271,563 filed on 27 February, 2001  
and entitled HIGH DYNAMIC RANGE COLOUR DISPLAY AND  
PROJECTION TECHNOLOGY.

### Technical Field

- 10 [0002] The invention relates to displays for displaying digital  
images.

### Background

- [0003] Dynamic range is the ratio of intensity of the highest  
15 luminance parts of a scene and the lowest luminance parts of a  
scene. For example, the image projected by a video projection system  
may have a maximum dynamic range of 300:1.

- [0004] The human visual system is capable of recognizing  
20 features in scenes which have very high dynamic ranges. For  
example, a person can look into the shadows of an unlit garage on a  
brightly sunlit day and see details of objects in the shadows even  
though the luminance in adjacent sunlit areas may be thousands of  
times greater than the luminance in the shadow parts of the scene.  
25 To create a realistic rendering of such a scene can require a display  
having a dynamic range in excess of 1000:1. The term "high dynamic  
range" means dynamic ranges of 800:1 or more.

- [0005] Modern digital imaging systems are capable of capturing  
30 and recording digital representations of scenes in which the dynamic

- 2 -

range of the scene is preserved. Computer imaging systems are capable of synthesizing images having high dynamic ranges. However, current display technology is not capable of rendering images in a manner which faithfully reproduces high dynamic  
5 ranges.

[0006] Blackham et al., U.S. patent No. 5,978,142 discloses a system for projecting an image onto a screen. The system has first and second light modulators which both modulate light from a light  
10 source. Each of the light modulators modulates light from the source at the pixel level. Light modulated by both of the light modulators is projected onto the screen.

[0007] Gibbon et al., PCT application No. PCT/US01/21367  
15 discloses a projection system which includes a pre modulator. The pre modulator controls the amount of light incident on a deformable mirror display device. A separate pre-modulator may be used to darken a selected area (e.g. a quadrant).

20 [0008] There exists a need for cost effective displays capable of reproducing a wide range of light intensities in displayed images.

#### Summary of the Invention

[0009] This invention provides displays for displaying images  
25 and methods for displaying images. One aspect of the invention provides a display comprising: a light source; a first spatial light modulator located to modulate light from the light source; a display screen comprising a second spatial light modulator; and, an optical

- 3 -

system configured to image light modulated by the first spatial light modulator onto a first face of the display screen.

[0010] Another aspect of the invention provides a display  
5 comprising: a light source; a first spatial light modulator located to modulate light from the light source, the first spatial light modulator comprising an array of controllable pixels; and, a second spatial light modulator located to modulate light modulated by the first spatial  
10 light modulator the second spatial light modulator comprising an array of controllable pixels; wherein each pixel of one of the first and second spatial light modulators corresponds to a plurality of pixels of the other one of the first and second light modulators.

[0011] Another aspect of the invention provides a display device  
15 comprising: first spatial modulation means for providing light spatially modulated at a first spatial resolution; second spatial ~~modulation means for further spatially modulating the light~~ at a second resolution different from the first resolution; and, means for controlling the first and second spatial modulation means to display  
20 an image defined by image data.

[0012] A still further aspect of the invention provides a method  
for displaying an image having a high dynamic range. The method comprises: generating light, spatially modulating the light according  
25 to image data in a first light modulating step; and, imaging the spatially modulated light onto a screen comprising a light modulator.

[0013] Further aspects of the invention and features of specific embodiments of the invention are described below.

- 4 -

### Brief Description of the Drawings

[0014] In drawings which illustrate non-limiting embodiments of the invention,

5 Figure 1 is a schematic illustration of a display according to one embodiment of the invention;

Figure 1A is a schematic illustration of a specific implementation of the display of Figure 1;

10 Figure 2 is a schematic illustration of a display according to an alternative embodiment of the invention comprising four spatial light modulators;

Figure 3 is a schematic illustration of a rear-projection-type display according to a further embodiment of the invention;

15 Figure 4 is a schematic illustration of a front-projection-type display according to a still further embodiment of the invention;

Figure 5 is a drawing illustrating a possible relationship between pixels in a **higher-resolution spatial light modulator** and pixels in a lower-resolution spatial light modulator in a display according to the invention;

20 Figure 5A illustrates an effect of providing one light modulator which has lower resolution than another light modulator;

Figure 6 is a schematic illustration of a front-projection-type color display having an alternative projector construction;

25 Figures 6A and 6B are expanded cross-sectional views of portions of the front-projection screen of the color display of Figure 6;

Figure 7 is a graph illustrating how light imaged onto a higher-resolution light modulator from pixels of a lower-resolution light modulator can overlap to yield a smooth variation in light intensity with position; and,

- 5 -

Figure 7A is a graph illustrating how the variation in light intensity with position for the image of a pixel of a light modulator can be represented as the convolution of a square profile and a spread function.

5

#### Description

[0015] Throughout the following description, specific details are set forth in order to provide a more thorough understanding of the invention. However, the invention may be practiced without these  
10 particulars. In other instances, well known elements have not been shown or described in detail to avoid unnecessarily obscuring the invention. Accordingly, the specification and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

15 [0016] This invention provides displays capable of rendering images with high dynamic ranges. Displays according to the ~~invention comprise two light modulating stages. Light passes~~ through the stages in series to provide an image which has an increased dynamic range.

20

[0017] Figure 1 illustrates schematically a display 10 according to a simple embodiment of the invention. The sizes of elements and distances between them in Figure 1 are not to scale. Display 10 comprises a light source 12. Light source 12 may, for example,  
25 comprise a projection lamp such as an incandescent lamp or an arc lamp, a laser, or another suitable source of light. Light source 12 may comprise an optical system comprising one or more mirrors, lenses or other optical elements which cooperate to deliver light to the rest of display 10.

- 6 -

[0018] In the illustrated embodiment, light from light source 12 is directed toward a first light modulator 16. Light source 12 preferably provides substantially uniform illumination of first light modulator 16. Light modulator 16 comprises an array of individually addressable elements. Light modulator 16 may comprise, for example, a LCD (liquid crystal display), which is an example of a transmission-type light modulator or a DMD (deformable mirror device), which is an example of a reflection-type light modulator. Display driver circuitry (not shown in Figure 1) controls the elements of light modulator 16 according to data which defines an image being displayed.

[0019] Light which has been modulated by first light modulator 16 is imaged onto a rear-projection screen 23 by a suitable optical system 17. Light from a small area of first light modulator 16 is directed by optical system 17 to a **corresponding area on rear-projection screen 23**. In the illustrated embodiment, optical system 17 comprises a lens having a focal length  $f$ . In general, the optical system 17 which images light modulated by first light modulator 16 onto rear-projection screen 23 may comprise one or more mirrors, lenses or other optical elements. Such an optical system has the function of imaging light modulated by the first light modulator onto a second light modulator.

25

[0020] In the illustrated embodiment, rear-projection screen 23 comprises a second light modulator 20 and a collimator 18. A main function of collimator 18 is to cause light which passes through rear-projection screen 23 to be directed preferentially toward a viewing



- 7 -

area. Collimator 18 may comprise a Fresnel lens, a holographic lens, or, in the alternative, another arrangement of one or more lenses and/or other optical elements which will guide light in the direction of a viewing area.

5

[0021] In the illustrated embodiment, collimator 18 causes light to travel through the elements of second light modulator 20 in a direction which is generally normal to screen 23. As light incident from collimator 18 travels through second light modulator 20 it is further modulated. The light then passes to a diffuser 22 which scatters the outgoing light through a range of directions so that a viewer located on an opposite side of diffuser 22 from first light modulator 16 can see light originating from the whole area of screen 23. In general, diffuser 22 may scatter light to a different angular extent in the horizontal and vertical planes. Diffuser 22 should be selected so that light modulated by second light modulator 20 is **scattered through a range of angles such that the maximum scatter** angle is at least equal to the angle subtended by screen 23 when viewed from a desired viewing location.

20

[0022] Rear-projection screen 23 may differ in area from first light modulator 16. For example, rear-projection screen 23 may be larger in area than first light modulator 16. Where this is the case, optical system 17 expands the beam of light modulated by first light modulator 16 to illuminate a larger corresponding area on rear-projection screen 23.

25

[0023] Second light modulator 20 may be of the same type as first light modulator 16 or a different type. Where first and second

- 8 -

light modulators 16 and 20 are both of types that polarize light, second light modulator 20 should, as much as is practical, be oriented so that its plane of polarization matches that of the light incident on it from first light modulator 16.

5

[0024] Display 10 may be a color display. This may be achieved in various ways including:

- making one of first light modulator 16 and second light modulator 20 a color light modulator;
- 10 • providing a plurality of different first light modulators 16 operating in parallel on different colors ; and,
- providing a mechanism for rapidly introducing different color filters into the light path ahead of second light modulator 20.

As an example of the first approach above, second light modulator 20  
15 may comprise an LCD panel having a plurality of pixels each comprising a number of colored sub-pixels. For example, each pixel may comprise three sub-pixels, one associated with a red filter, one associated with a green filter and one associated with a blue filter. The filters may be integral with the LCD panel.

20

[0025] As shown in Figure 1A, Light source 12, first light modulator 16 and optical system 17 may all be parts of a digital video projector 37 located to project an image defined by a signal 38A from a controller 39 onto the back side of rear-projection screen 23.

25 The elements of second light modulator 20 are controlled by a signal 38B from controller 39 to provide an image to a viewer which has a high dynamic range.

- 9 -

[0026] As shown in Figure 2, a display 10A according to the invention may comprise one or more additional light modulation stages 24. Each additional light modulation stage 24 comprises a collimator 25, a light modulator 26 and an optical system 27 which focuses light from light modulator 26 onto either the next additional light modulation stage 24 or on collimator 18. In device 10A of Figure 2 there are two additional light modulation stages 24. Devices according to this embodiment of the invention may have one or more additional light modulation stages 24.

10

[0027] The luminance of any point on output diffuser 22 can be adjusted by controlling the amount of light passed on by corresponding elements of light modulators 16, 20 and 26. This control may be provided by a suitable control system (not shown in Figure 2) connected to drive each of light modulators 16, 20 and 26.

15

[0028] As noted above, light modulators 16, 20 and 26 may all be of the same type or may be of two or more different types. Figure 3 illustrates a display 10B according to an alternative embodiment of the invention which includes a first light modulator 16A which comprises a deformable mirror device. A deformable mirror device is a "binary" device in the sense that each pixel may be either "on" or "off". Different apparent brightness levels may be produced by turning a pixel on and off rapidly. Such devices are described, for example, in U.S. patent Nos. 4,441,791 and, 4,954,789 and are commonly used in digital video projectors. Light source 12 and first light modulator 16 (or 16A) may be the light source and modulator from a commercial digital video projector, for example.

20

25

- 10 -

[0029] Figure 4 illustrates a front-projection-type display 10C according to the invention. Display 10C comprises a screen 34. A projector 37 projects an image 38 onto screen 34. Projector 37 comprises a suitable light source 12, a first light modulator 16 and  
5 an optical system 17 suitable for projecting an image defined by first light modulator 16 onto screen 34. Projector 37 may comprise a commercially available display projector. Screen 34 incorporates a second light modulator 36. Second light modulator 36 comprises a number of addressable elements which can be individually controlled  
10 to affect the luminance of a corresponding area of screen 34.

[0030] Light modulator 36 may have any of various constructions. For example, light modulator 36 may comprise an array of LCD elements each having a controllable transmissivity  
15 located in front of a reflective backing. Light projected by projector 37 passes through each LCD element and is reflected back through the LCD element by the reflective **backing**. **The luminance at any** point on screen 34 is determined by the intensity of light received at that point by projector 37 and the degree to which light modulator 36  
20 (e.g. the LCD element at that point) absorbs light being transmitted through it.

[0031] Light modulator 36 could also comprise an array of elements having variable retro-reflection properties. The elements  
25 may be prismatic. Such elements are described, for example, in Whitehead, U.S. patent No. 5,959,777 entitled Passive High Efficiency Variable Reflectivity Image Display Device and, Whitehead et al., U.S. patent No. 6,215,920 entitled Electrophoretic,

- 11 -

## High Index and Phase Transition Control of Total Internal Reflection in High Efficiency Variable Reflectivity Image Displays.

[0032] Light modulator 36 could also comprise an array of electrophoretic display elements as described, for example, in Albert et al., U.S. patent No. 6,172,798 entitled Shutter Mode Microencapsulated Electrophoretic Display; Comiskey et al., U.S. patent No. 6,120,839 entitled Electro-osmotic Displays and Materials for Making the Same; Jacobson, U.S. patent No. 6,120,588 entitled: Electronically Addressable Microencapsulated Ink and Display; Jacobson et al., U.S. patent No. 6,323,989 entitled Electrophoretic Displays Using Nanoparticles; Albert, U.S. patent No. 6,300,932 entitled Electrophoretic Displays with Luminescent Particles and Materials for Making the Same or, Comiskey et al., U.S. patent No. 6,327,072 entitled Microcell Electrophoretic Displays.

[0033] As shown in Figures 6A and 6B, screen 34 preferably comprises a lens element 40 which functions to direct light preferentially toward the eyes of viewers. In the illustrated embodiment, lens element 40 comprises a Fresnel lens having a focal point substantially coincident with the apex of the cone of light originating from projector 37. Lens element 40 could comprise another kind of lens such as a holographic lens. Lens element 40 incorporates scattering centers 45 which provide a desired degree of diffusion in the light reflected from screen 34. In the illustrated embodiment, second light modulator 36 comprises a reflective LCD panel having a large number of pixels 42 backed by a reflective layer 43 and mounted on a backing 47.

- 12 -

[0034] Where light modulator 36 comprises an array of elements having variable retro-reflection properties, the elements themselves could be designed to direct retro-reflected light preferentially in a direction of a viewing area in front of screen 34.

- 5 Reflective layer 43 may be patterned to scatter light to either augment the effect of scattering centers 45 or replace scattering centers 45.

[0035] As shown in Figure 4, a controller 39 provides data  
10 defining image 38 to each of first light modulator 16 and second light modulator 36. Controller 39 could comprise, for example, a computer equipped with a suitable display adapter. Controller 39 may comprise image processing hardware to accelerate image processing steps. The luminance of any point on screen 34 is determined by the  
15 combined effect of the pixels in first light modulator 16 and second light modulator 36 which correspond to that point. There is **minimum luminance at points for which corresponding pixels of the first and second light modulators are set to their "darkest" states.** There is maximum luminance at points for which corresponding  
20 pixels of the first and second light modulators are set to their "brightest" states. Other points have intermediate luminance values. The maximum luminance value might be, for example, on the order of  $10^5$  cd/m<sup>2</sup>. The minimum luminance value might be, for example on the order of  $10^{-2}$  cd/m<sup>2</sup>.

25

[0036] The cost of a light modulator and its associated control circuitry tends to increase with the number of addressable elements in the light modulator. In some embodiments of the invention one of the light modulators has a spatial resolution significantly higher

- 13 -

than that of one or more other ones of the light modulators. When one or more of the light modulators are lower-resolution devices the cost of a display according to such embodiments of the invention may be reduced. In color displays comprising two or more light modulators, one of which is a color light modulator (a combination of a plurality of monochrome light modulators may constitute a color light modulator as shown, for example, in Figure 6) and one of which is a higher-resolution light modulator, the higher-resolution light modulator should also be the color light modulator. In some embodiments the higher-resolution light modulator is imaged onto the lower-resolution light modulator. In other embodiments the lower-resolution light modulator is imaged onto the higher-resolution light modulator.

[0037] Figure 5 illustrates one possible configuration of pixels in a display 10 as shown in Figure 1. Nine pixels 42 of a second light modulator 20 correspond to each pixel 44 of a first light modulator 16. The number of pixels 42 of second light modulator 20 which correspond to each pixel 44 of first light modulator 16 may be varied as a matter of design choice. Pixels 44 of the higher-resolution one of first and second light modulators 16 and 20 (or 36) should be small enough to provide a desired overall resolution. In general there is a trade off between increasing resolution and increasing cost. In a typical display the higher-resolution light modulator will provide an array of pixels having at least a few hundred pixels in each direction and more typically over 1000 pixels in each direction.

[0038] The size of pixels 42 of the lower-resolution one of the first and second light modulators determines the scale over which

- 14 -

one can reliably go from maximum intensity to minimum intensity. Consider, for example, Figure 5A which depicts a situation where one wishes to display an image of a small maximum-luminance spot on a large minimum-luminance background. To obtain maximum  
5 luminance in a spot 47, those pixels of each of the first and second light modulators which correspond to spot 47 should be set to their maximum-luminance values. Where the pixels of one light modulator are lower in resolution than pixels of the other light modulator then some pixels of the lower-resolution light modulator will straddle the  
10 boundary of spot 47. This is the case, for example, in Figure 5A.

[0039] Outside of spot 47 there are two regions. In region 48 it is not possible to set the luminance to its minimum value because in that region the lower-resolution light modulator is set to its highest  
15 luminance value. In region 49 both of the light modulators can be set to their lowest-luminance values. If, for example, each of the first and second light modulators has a **luminance range of 1 to 100 units**, then region 47 might have a luminance of  $100 \times 100 = 10,000$  units, region 48 would have a luminance of  $100 \times 1 = 100$  units and region 49  
20 would have a luminance of  $1 \times 1 = 1$  units.

[0040] As a result of having one of the light modulators lower in resolution than the other, each pixel of the lower-resolution light modulator corresponds to more than one pixel in the higher-  
25 resolution light modulator. It is not possible for points corresponding to any one pixel of the lower-resolution light modulator and different pixels of the higher-resolution light modulator to have luminance values at extremes of the device's dynamic range. The maximum



- 15 -

difference in luminance between such points is determined by the dynamic range provided by the higher-resolution light modulator.

[0041] It is generally not a problem that a display is not capable  
5 of causing closely-spaced points to differ in luminance from one  
another by the full dynamic range of the display. The human eye has  
enough intrinsic scatter that it is incapable of appreciating large  
changes in luminance which occur over very short distances in any  
event.

10

[0042] In a display according to the invention which includes  
both a lower-resolution spatial light modulator and a higher-  
resolution spatial light modulator, controller 39 may determine a  
value for each pixel of the lower-resolution spatial light modulator  
15 and adjust the signals which control the higher-resolution spatial  
light modulator to reduce artefacts which result from the fact that  
**each pixel of the lower-resolution spatial light modulator is common**  
to a plurality of pixels of the higher-resolution spatial light  
modulator. This may be done in any of a wide number of ways.

20

[0043] For example, consider the case where each pixel of the  
lower-resolution spatial light modulator corresponds to a plurality of  
pixels of the higher-resolution spatial light modulator. Image data  
specifying a desired image is supplied to the controller. The image  
25 data indicates a desired luminance for an image area corresponding  
to each of the pixels of the higher-resolution spatial light modulator.  
The controller may set the pixels of the lower-resolution light  
modulator to provide an approximation of the desired image. This  
could be accomplished, for example, by determining an average or

- 16 -

weighted average of the desired luminance values for the image areas corresponding to each pixel of the lower-resolution light modulator.

- 5 [0044] The controller may then set the pixels of the higher-resolution light modulator to cause the resulting image to approach the desired image. This could be done, for example, by dividing the desired luminance values by the known intensity of light incident from the lower-resolution light modulator on the corresponding  
10 pixels of the higher-resolution light modulator. Processing to generate the signals for driving the light modulators may be performed on the fly by controller 39, may be performed earlier by controller 39 or some other device and integrated into the image data or some processing may be performed earlier and controller 39 may  
15 perform final processing to generate the control signals.

- [0045] If the low-resolution **pixels are too large then a viewer** may be able to discern a halo around bright elements in an image. The low resolution pixels are preferably small enough that the  
20 appearance of bright patches on dark backgrounds or of dark spots on bright backgrounds is not unacceptably degraded. It is currently considered practical to provide in the range of about 8 to about 144, more preferably about 9 to 36, pixels on the higher-resolution light modulator for each pixel of the lower-resolution light modulator.

25

- [0046] The sizes of steps in which each of pixels 42 and 44 can adjust the luminance of point(s) on the image are not necessarily equal. The pixels of the lower-resolution light modulator may adjust light intensity in coarser steps than the pixels of the higher-

- 17 -

resolution light modulator. For example, the lower-resolution light modulator may permit adjustment of light intensity for each pixel over an intensity range of 1 to 512 units in 8 steps while the higher-resolution light modulator may permit adjustment of the light intensity for each pixel over a similar range in 512 steps. While pixels 42 and 44 are both illustrated as being square in Figure 5, this is not necessary. Pixels 42 and/or 44 could be other shapes, such as rectangular, triangular, hexagonal, round, or oval.

10 [0047] The pixels of the lower-resolution light modulator preferably emit light which is somewhat diffuse so that the light intensity varies reasonably smoothly as one traverses pixels of the lower-resolution light modulator. This is the case where the light from each of the pixels of the lower-resolution light modulator  
15 spreads into adjacent pixels, as shown in Figure 7. As shown in Figure 7A, the intensity profile of a pixel in the lower-resolution light ~~modulator can often be approximated by gaussian spread function~~ convolved with a rectangular profile having a width  $d_1$  equal to the active width of the pixel. The spread function preferably has a full  
20 width at half maximum in the range of  $0.3 \times d_2$  to  $3 \times d_2$ , where  $d_2$  is the center-to-center inter-pixel spacing, to yield the desired smoothly varying light intensity. Typically  $d_1$  is nearly equal to  $d_2$ .

[0048] In the embodiment of Figure 5, each pixel 42 comprises  
25 three sub pixels 43R, 43G and 43B (for clarity Figure 5 omits sub pixels for some pixels 42). Sub-pixels 43R, 43G and 43B are independently addressable. They are respectively associated with red, green and blue color filters which are integrated into second light modulator 20. Various constructions of LCD panels which

- 18 -

include a number of colored sub-pixels and are suitable for use in this invention are known in the art.

[0049] For front projection-type displays (for example the display 10C of Figure 4), it is typically most practical for first light modulator 16 to comprise a high-resolution light modulator which provides color information and for light modulator 36 to comprise a monochrome light modulator. Light modulator 36 preferably has reasonably small addressable elements so that the boundaries of its elements do not form a visually distracting pattern. For example, light modulator 36 may have the same number of addressable elements as projector 37 (although each such element will typically have significantly larger dimensions than the corresponding element in light modulator 16 of projector 37).

15

[0050] Projector 37 may have any suitable construction. All that **is required is that projector 37 be able to project light which has been** spatially modulated to provide an image onto screen 34. Figure 6 illustrates a display system 10D according to a further alternative embodiment of the invention. System 10D comprises a screen 34 which has an integrated light modulator 36 as described above with reference to Figure 4. System 10D comprises a projector 37A which has separate light modulators 16R, 16G and 16B for each of three colors. Light modulated by each of light modulators 16R, 16G and 16B is filtered by a corresponding one of three colored filters 47R, 47G and 47B. The modulated light is projected onto screen 34 by optical systems 17. A single light source 12 may supply light to all three light modulators 16R, 16G, and 16B, or separate light sources (not shown) may be provided.

- 19 -

[0051] As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof. For example:

- diffuser 22 and collimator 18 could be combined with one another;
- diffuser 22 and collimator 18 could be reversed in order;
- multiple cooperating elements could be provided to perform light diffusion and/or collimation;
- the order in screen 23 of second light modulator 20 collimator 18 and diffuser 22 could be varied;
- the signal 38A driving first light modulator 16 may comprise the same data driving second light modulator 20 or may comprise different data.

Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

- 20 -

## WHAT IS CLAIMED IS:

1. A display comprising:
  - a light source;
  - a first spatial light modulator located to modulate light
  - 5 from the light source;
  - a display screen comprising a second spatial light modulator; and,
  - an optical system configured to image light modulated by the first spatial light modulator onto a first face of the display
  - 10 screen.
2. The display of claim 1 wherein the display screen comprises a diffuser.
- 15 3. The display of claim 2 wherein the display screen comprises a collimator located to collimate light incident from the first spatial light modulator.
- 20 4. The display of claim 1 wherein the display comprises a rear-projection-type display and the display screen is configured to transmit light to a viewer on a side of the display screen opposite to the first face of the display screen.
- 25 5. The display of claim 4 wherein the display screen comprises a collimator located to collimate light incident from the first spatial light modulator.
6. The display of claim 5 wherein the collimator comprises a Fresnel lens.

- 21 -

7. The display of claim 6 wherein the diffuser comprises a large number of scattering centers distributed in the Fresnel lens.
8. The display of claim 5 wherein the collimator comprises a holographic lens.
9. The display of claim 8 wherein the diffuser comprises a large number of scattering centers distributed in the holographic lens.
10. The display of claim 4 wherein the diffuser is on a face of the screen opposite to a face on which light from the first spatial light modulator is incident.
11. The display of claim 4 wherein the second spatial light modulator comprises an array of liquid crystal display ~~elements each having a transmissivity controllable by a control~~ signal.
12. The display of claim 4 wherein, each of the first and second spatial light modulators comprises a plurality of controllable elements and for each controllable element of one of the first and second spatial light modulators, the other one of the first and second spatial light modulators has more than one corresponding controllable elements.
13. The display of claim 4 wherein each of the first and second spatial light modulators comprises a plurality of controllable elements and a plurality of the controllable elements of the

- 22 -

first spatial light modulator correspond to each controllable element of the second spatial light modulator.

14. The display of claim 13 wherein the first spatial light  
5 modulator comprises a color spatial light modulator.
15. The display of claim 13 wherein, for each controllable element  
of one of the first and second spatial light modulators, the  
other one of the first and second spatial light modulators has  
10 more than eight corresponding controllable elements.
16. The display of claim 15 wherein each controllable element of  
the other one of the first and second spatial light modulators  
comprises a plurality of color sub pixels.
- 15
17. The display of claim 4 wherein, each of the first and second  
**spatial light modulators comprises a plurality of controllable**  
elements and for each controllable element of one of the first  
and second spatial light modulators, the other one of the first  
20 and second spatial light modulators has in the range of eight to  
one hundred forty four corresponding controllable elements.
18. The display of claim 4 wherein the first spatial light modulator  
is higher in resolution than the second spatial light modulator.
- 25
19. The display of claim 18 wherein the light source and first  
spatial light modulator comprise the light source and first  
spatial light modulator of a digital projector and the digital  
projector comprises imaging optics which image the first



- 23 -

spatial light modulator onto the second spatial light modulator.

- 5 20. The display of claim 19 comprising a controller connected to deliver image data to both the first and second spatial light modulators.
- 10 21. The display of claim 1 comprising one or more additional light modulation stages between the first spatial light modulator and the second spatial light modulator.
- 15 22. The display of claim 21 wherein the one or more additional light modulation stages each comprise a collimator and a spatial light modulator onto which light modulated by a previous spatial light modulator is imaged.
23. ~~The display of claim 22 wherein the one or more additional~~  
light modulation stages each comprise a diffuser.
- 20 24. The display of claim 4 wherein the screen is larger in area than the first light modulator.
- 25 25. The display of claim 1 wherein a ratio of a luminance of points on the display screen for which corresponding controllable elements of each of the first and second spatial light modulators are both set to provide a maximum illumination and a luminance points on the display screen for which corresponding controllable elements of each of the first and

- 24 -

second spatial light modulators are both set to provide a minimum illumination of have a ratio exceeding 1000:1.

- 5 26. The display of claim 1 wherein a ratio of a luminance of points on the display screen for which corresponding controllable elements of each of the first and second spatial light modulators are both set to provide a maximum illumination and a luminance points on the display screen for which corresponding controllable elements of each of the first and
- 10 second spatial light modulators are both set to provide a minimum illumination of have a ratio exceeding 1500:1.
- 15 27. The display of claim 1 wherein the display comprises a front-projection-type display and the display screen is configured to reflect light to a viewer.
- 20 28. The display of claim **27 wherein the second spatial light** modulator comprises a transmission-type spatial light modulator.
29. The display of claim 27 wherein the second spatial light modulator comprises an array of variable transmissivity liquid crystal display elements.
- 25 30. The display of claim 27 wherein the second light modulator comprises an array of retro-reflective display elements.
31. The display of claim 27 wherein the second light modulator comprises an array of electrophoretic display elements.

- 25 -

32. The display of claim 27 wherein the second light modulator comprises an array of variable-transmissivity elements located in front of a reflector.
- 5 33. The display of claim 32 wherein the reflector has a roughened surface and the reflector both scatters and reflects light incident on it through the variable-transmissivity element.
34. The display of claim 32 wherein the variable-transmissivity  
10 element comprises a liquid crystal display element.
35. The display of claim 34 wherein the reflector has a roughened surface and the reflector both scatters and reflects light incident on it through the liquid crystal display element.
- 15 36. The display of claim 27 wherein each of the first and second ~~spatial light modulators~~ comprises a plurality of controllable elements and a plurality of the controllable elements of the first spatial light modulator correspond to each controllable  
20 element of the second spatial light modulator.
37. The display of claim 36 wherein the first spatial light modulator comprises a color spatial light modulator.
- 25 38. The display of claim 37 wherein the second spatial light modulator comprises a monochrome spatial light modulator.
39. The display of claim 36 wherein, there are more than eight controllable elements of the first spatial light modulator

- 26 -

corresponding to each controllable element of the second spatial light modulator.

- 5           40.   The display of claim 36 wherein, there are between eight and one hundred forty four controllable elements of the first spatial light modulator corresponding to each controllable element of the second spatial light modulator.
- 10          41.   The display of claim 40 wherein each controllable element of the first spatial light modulator comprises a plurality of color sub pixels.
- 15          42.   The display of claim 26 wherein the light source and first spatial light modulator comprise the light source and first spatial light modulator of a digital projector and the digital projector comprises imaging optics which image the first ~~spatial light modulator onto the second spatial light~~ modulator.
- 20          43.   The display of claim 42 comprising a controller connected to deliver image data to both the first and second spatial light modulators.
- 25          44.   The display of claim 26 wherein the screen is larger in area than the first light modulator.
45.   The display of claim 1 wherein, each of the first and second spatial light modulators comprises a plurality of controllable

- 27 -

elements and for each controllable element of the first spatial light modulator, the second spatial light modulator has more than one corresponding controllable elements.

- 5     46.     The display of claim 45 wherein, at the second spatial light modulator, a distribution of the light modulated by each of a plurality of controllable elements of the first spatial light modulator comprises a convolution of a rectangular distribution and a spread function wherein the spread function  
10     has a full width at half maximum in the range of  $0.3 \times d_2$  to  $3 \times d_2$  where  $d_2$  is a center-to-center spacing on the second light modulator of distributions of light modulated by adjacent controllable elements of the first spatial light modulator.
- 15     47.     The display of claim 45 wherein each of a plurality of controllable elements of the first spatial light modulator ~~produces a distribution of light on the second spatial light~~ modulator and the distributions of light on the second spatial light modulator arising from adjacent controllable elements of  
20     the first spatial light modulator overlap with one another.
- 25     48.     The display of claim 45 comprising a controller connected to drive each of the first and second spatial light modulators, the controller configured to provide a first control signal to control the controllable elements of the first spatial light modulator to provide an approximation of a desired image and to provide a second control signal to control the controllable elements of the second spatial light modulator to correct the approximate image.

- 28 -

49. The display of claim 48 wherein the first control signal controls each controllable element of the first spatial light modulator to contribute a luminance which is an average, or weighted average, of a plurality of desired luminance values for image areas corresponding to the controllable element of the first spatial light modulator.
50. The display of claim 49 wherein the second control signal controls the controllable elements of the second spatial light modulator to modulate light incident on them by an amount based upon the desired luminance values divided by a known intensity of light incident from the first spatial light modulator on the controllable element of the second spatial light modulator.
51. The display device of claim 1 wherein each of the first and second spatial ~~light modulators~~ **comprises a plurality of** controllable elements, the controllable elements of the first light modulator have a number  $N$  of discrete selectable brightness levels, the controllable elements of the second light modulator have a number  $M$  of discrete selectable brightness levels and  $N > M$ .
52. The display device of claim 1 wherein each of the first and second spatial light modulators comprises a plurality of controllable elements, the controllable elements of the first light modulator have a number  $N$  of discrete selectable brightness levels, the controllable elements of the second light

- 29 -

modulator have a number  $M$  of discrete selectable brightness levels and  $N < M$ .

53. The display of claim 1 wherein the first spatial light modulator  
5 comprises a deformable mirror device.

54. The display of claim 53 wherein the second spatial light  
modulator comprises an array of liquid crystal display  
elements.

10

55. A display comprising:

a light source;

a first spatial light modulator located to modulate light  
from the light source, the first spatial light modulator  
15 comprising an array of controllable pixels; and,

a second spatial light modulator located to modulate  
**light modulated by the first spatial light modulator** the second  
spatial light modulator comprising an array of controllable  
pixels;

20

wherein each pixel of one of the first and second spatial light  
modulators corresponds to a plurality of pixels of the other one  
of the first and second spatial light modulators.

56. The display device of claim 55 comprising a collimator located  
25 to collimate light modulated by the first spatial light  
modulator before the light is modulated by the second spatial  
light modulator.

- 30 -

57. The display device of claim 55 comprising a diffuser located to scatter light modulated by the first and second spatial light modulators.
- 5 58. The display of claim 55 wherein the first spatial light modulator comprises a color spatial light modulator.
59. The display device of claim 55 wherein the light source and first spatial light modulator comprise the light source and first  
10 spatial light modulator of a digital projector and the digital projector comprises imaging optics which image the first spatial light modulator onto the second spatial light modulator.
- 15 60. The display device of claim 55 wherein there are between eight and one hundred forty four pixels of the first spatial light modulator corresponding to each pixel of the second spatial light modulator.
- 20 61. The display device of claim 55 wherein for each pixel of one of the first and second spatial light modulators, the other one of the first and second spatial light modulators has between eight and one hundred forty four corresponding pixels.
- 25 62. The display device of claim 55 wherein each pixel of the first spatial light modulator corresponds to a plurality of pixels of the second spatial light modulator.
63. A display device comprising:



- 31 -



first spatial modulation means for providing light  
spatially modulated at a first spatial resolution;

second spatial modulation means for further spatially  
modulating the light at a second resolution different from the  
5 first resolution; and,


means for controlling the first and second spatial  
modulation means to display an image defined by image data.

64. A method for displaying an image having a high dynamic  
10 range, the method comprising:  
generating light,  
spatially modulating the light according to image data in  
a first light modulating step; and,  
imaging the spatially modulated light onto a screen  
15 comprising a light modulator.


1/6

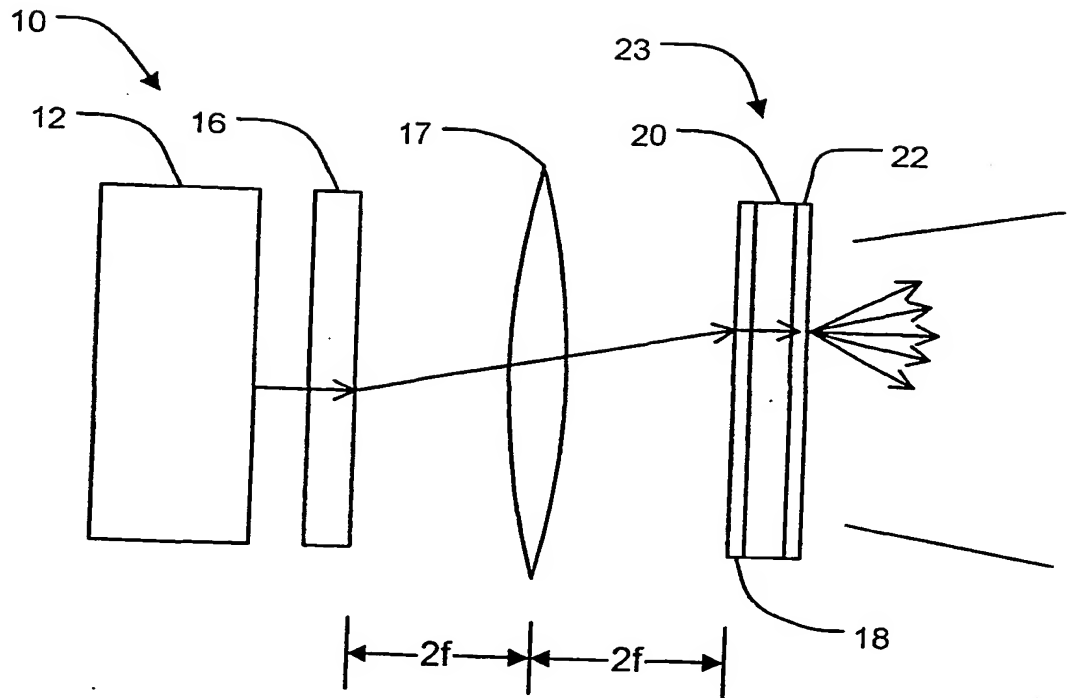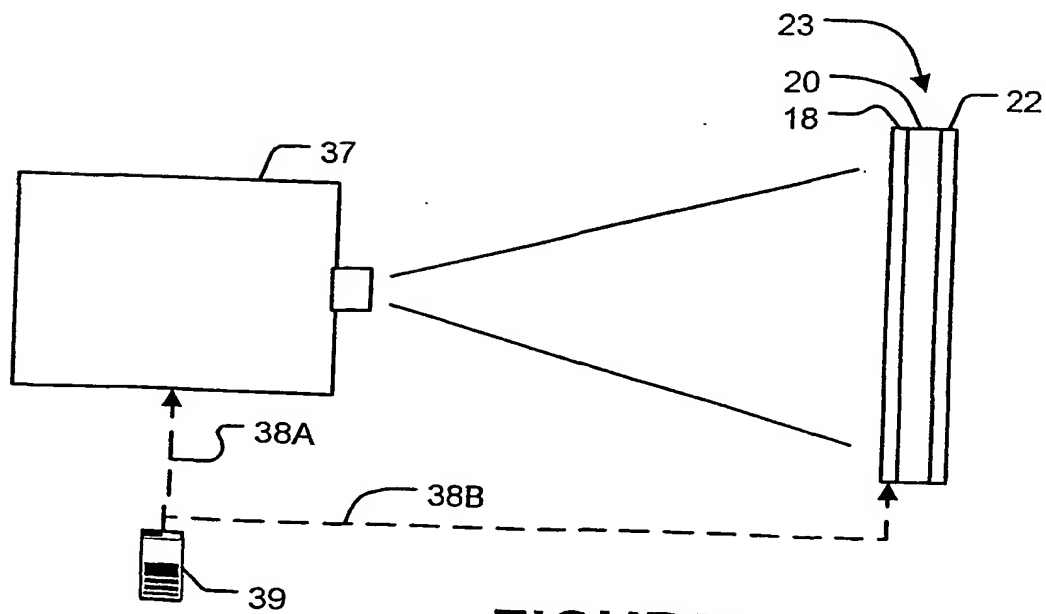**FIGURE 1****FIGURE 1A**

2/6

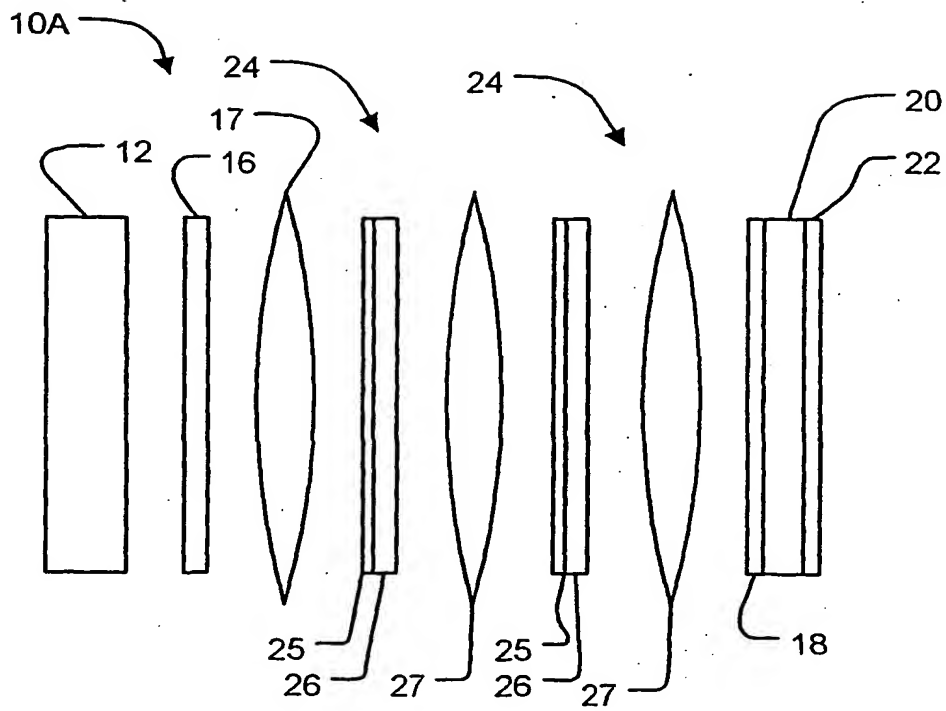

**FIGURE 2**

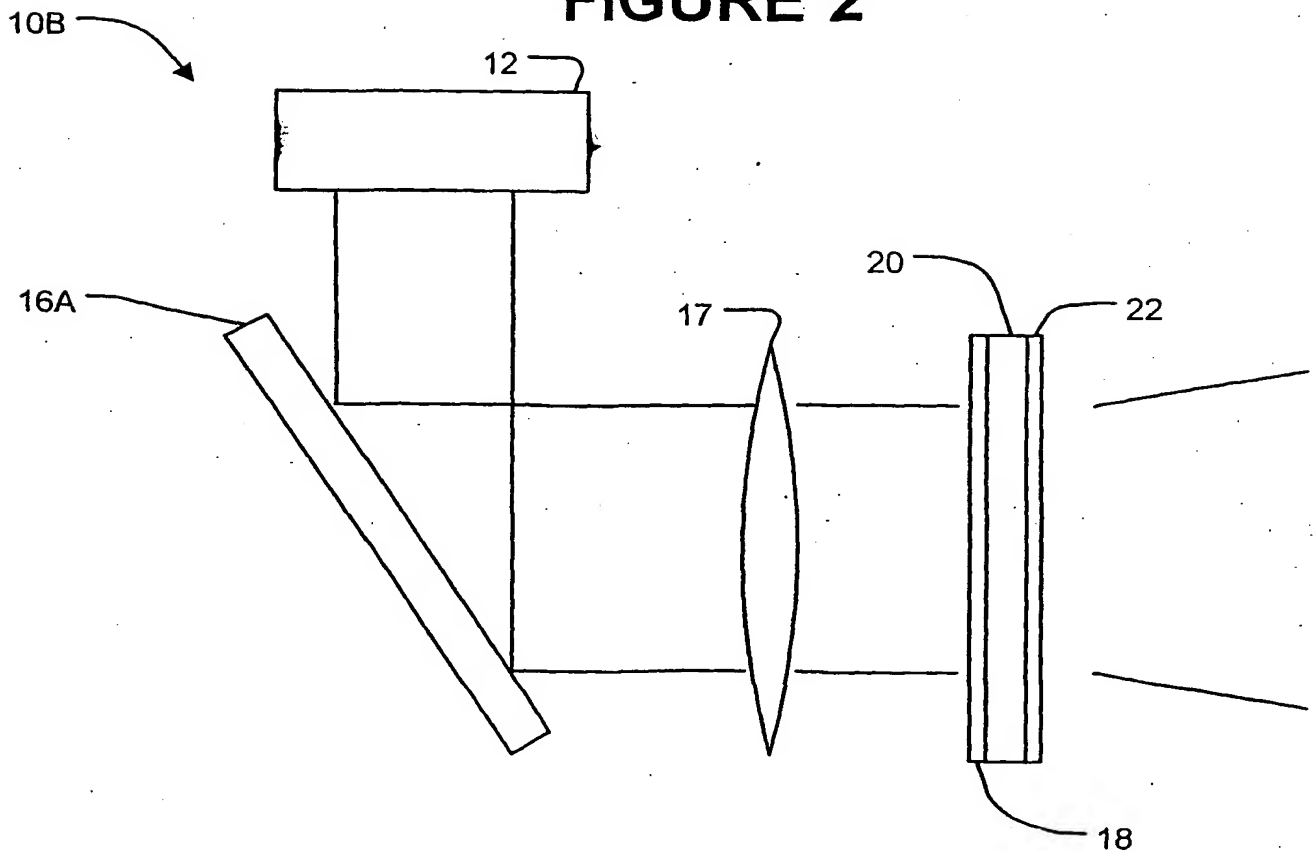

**FIGURE 3**

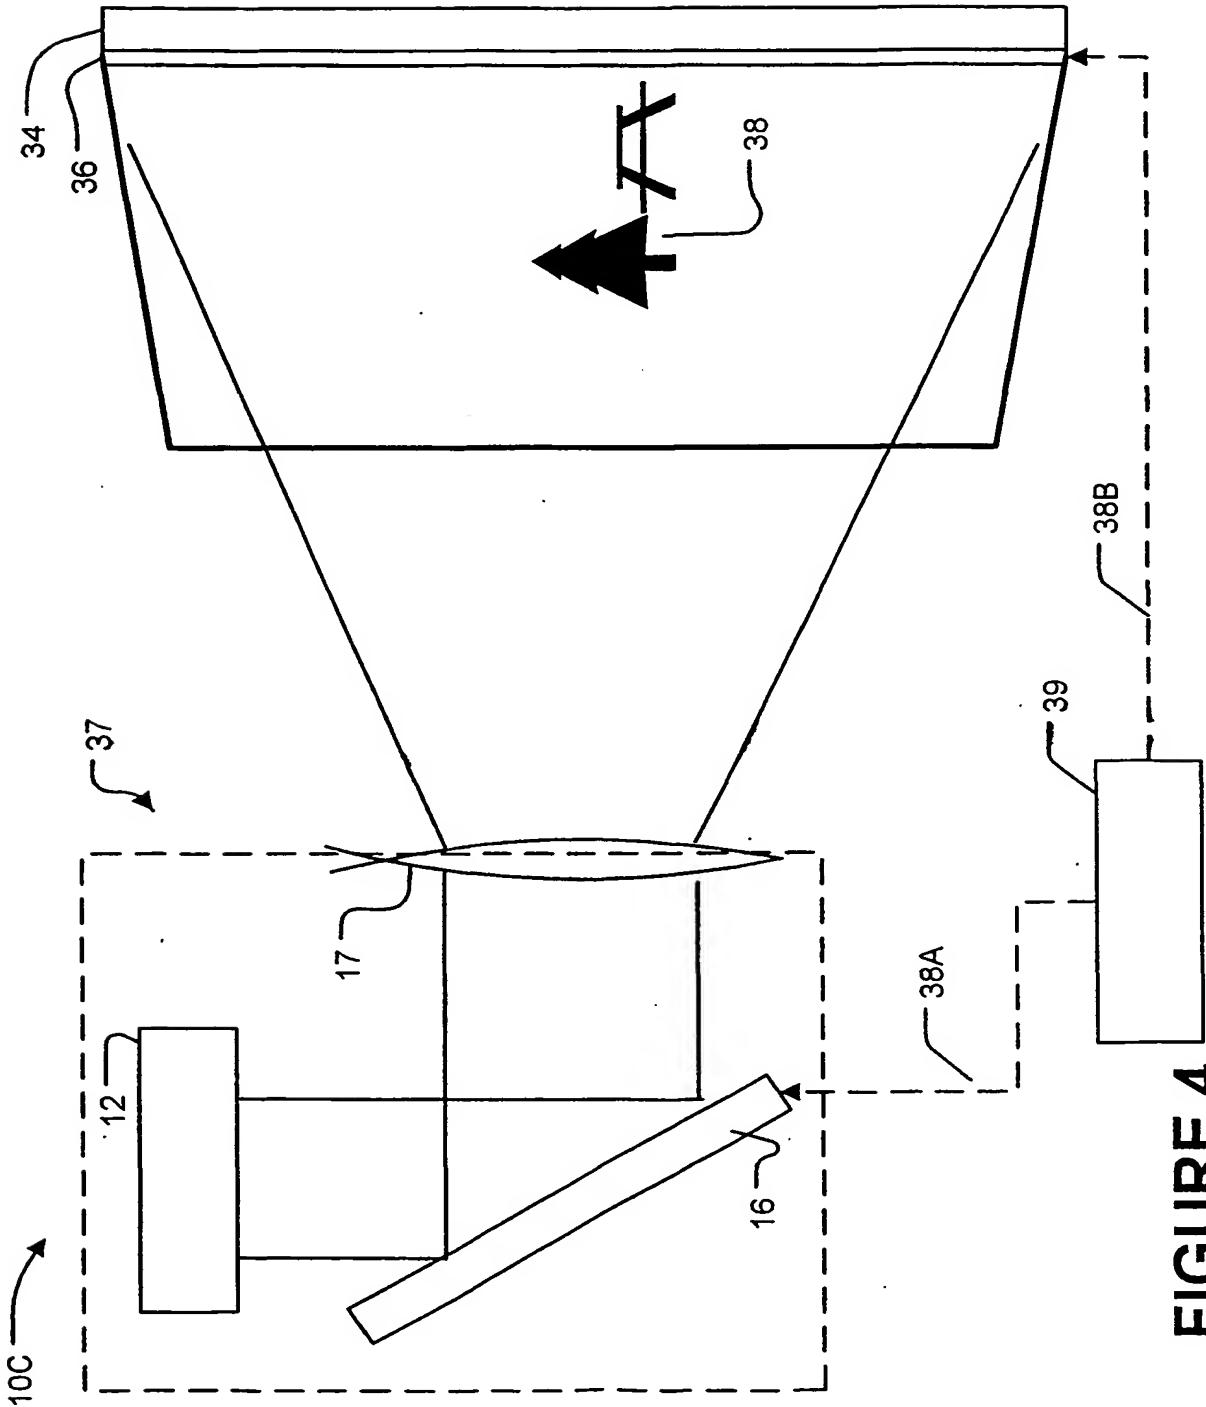


FIGURE 4

4/6

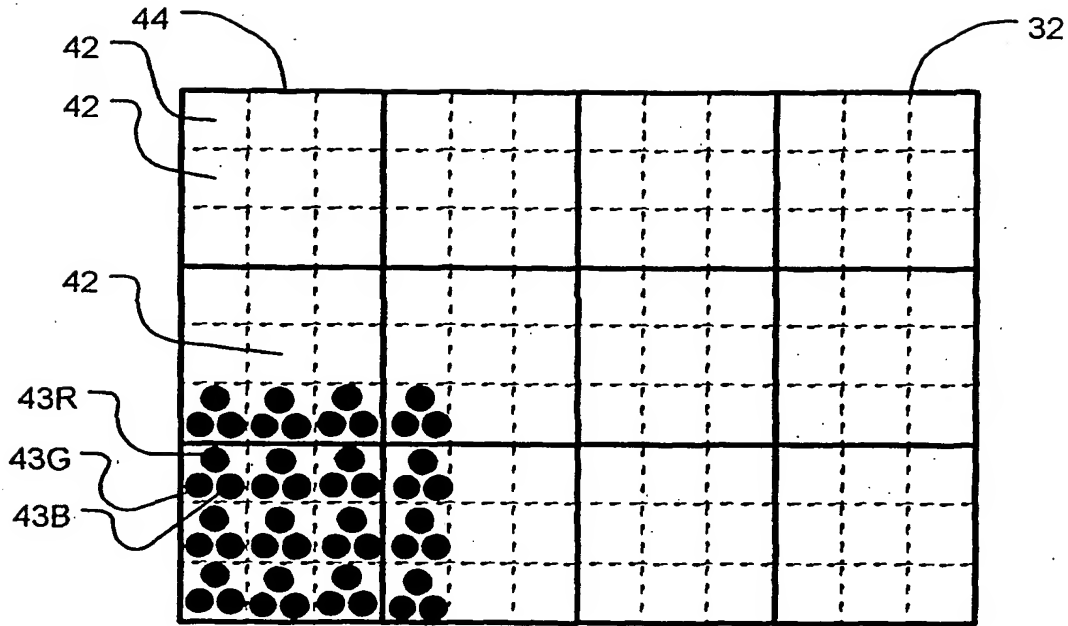


FIGURE 5



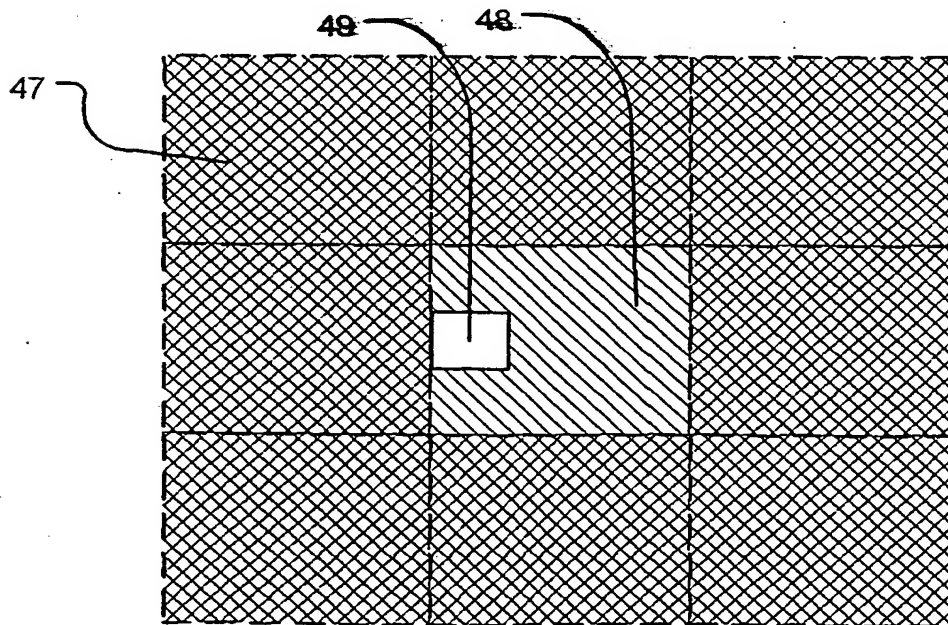




FIGURE 5A

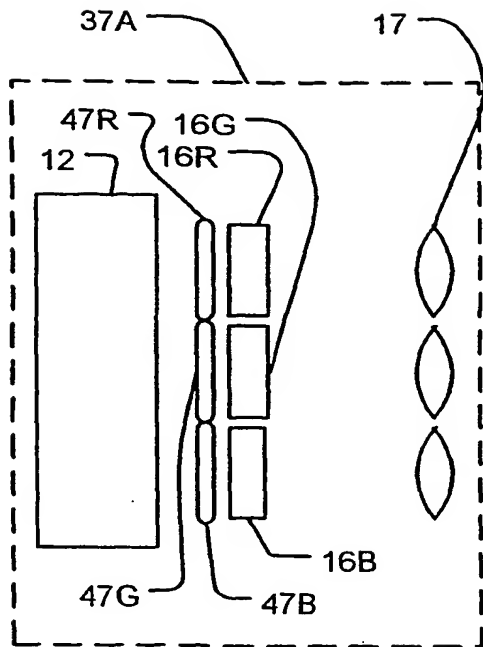

**FIGURE 6**


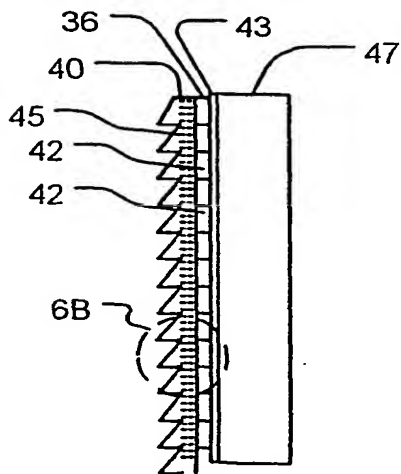


**FIGURE 6A**

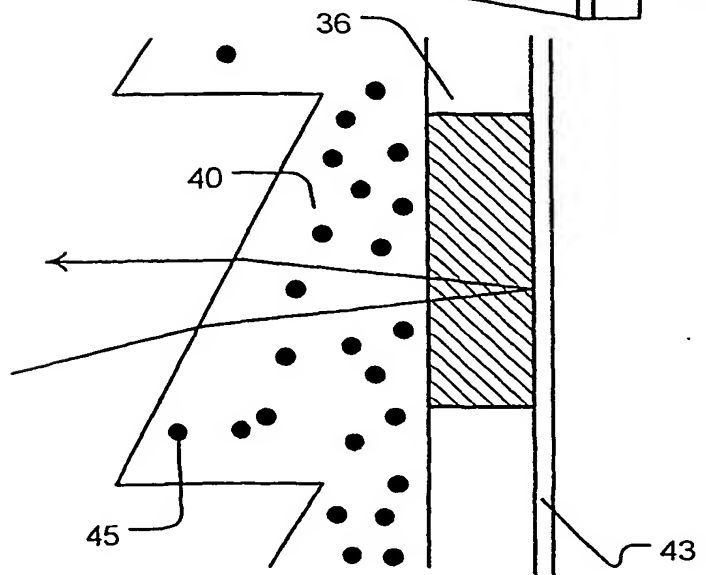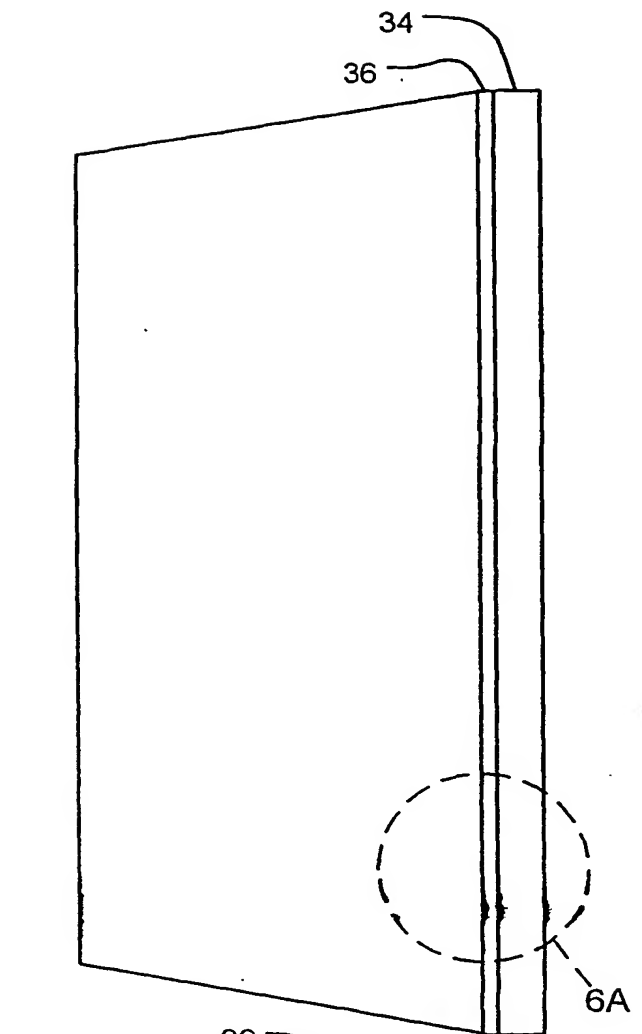

**FIGURE 6B**

6/6

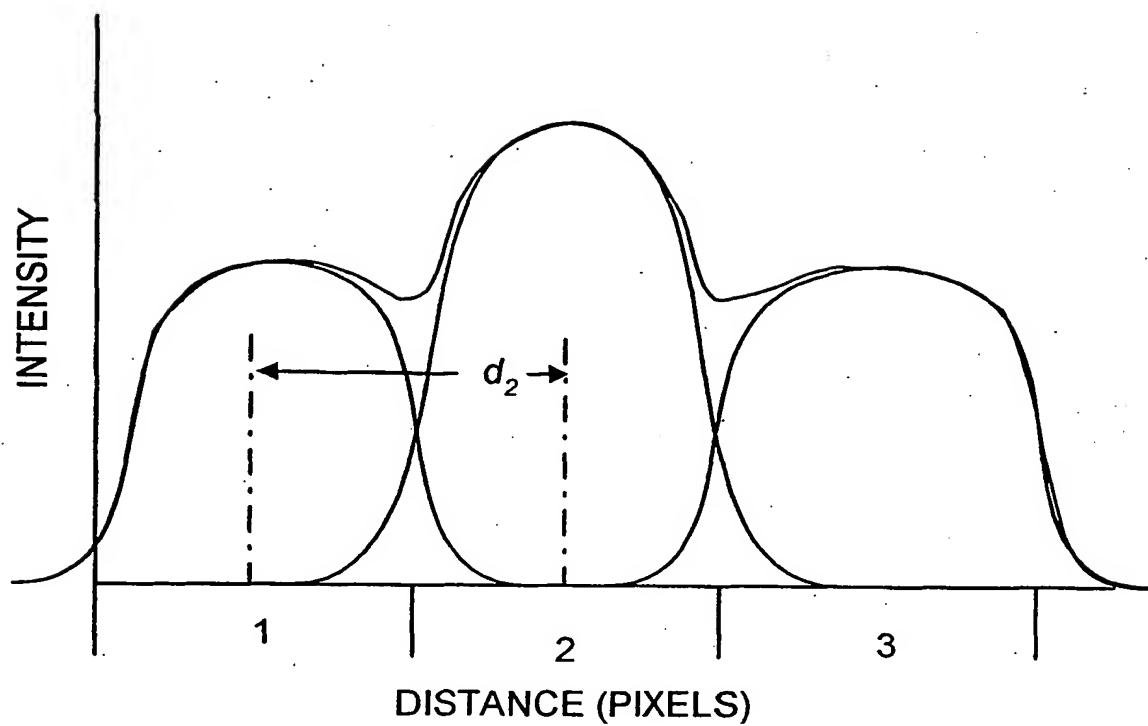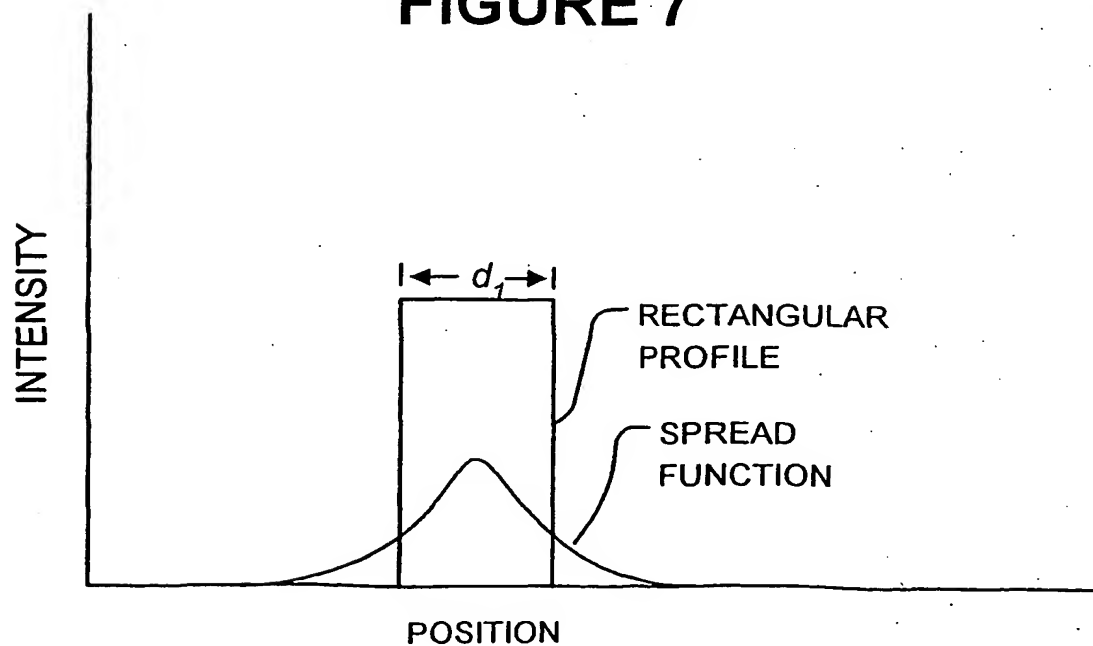**FIGURE 7****FIGURE 7A**

**This Page Blank (uspto)**



CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069030 A2**

(51) International Patent Classification<sup>7</sup>: **G02F 1/1335**

(21) International Application Number: **PCT/CA02/00255**

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/271,563 27 February 2001 (27.02.2001) US

(71) Applicant (for all designated States except US): **THE UNIVERSITY OF BRITISH COLUMBIA [CA/CA]**;  
Industry Liaison Office, Room 331 IRC Building, 2194  
Health Sciences Building, Vancouver, British Columbia  
V6T 1Z3 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WHITEHEAD, Lorne [CA/CA]**; 3015 W. 12th Avenue, Vancouver, British


Columbia V6K 2R4 (CA). **WARD, Greg [US/US]**; 149  
Commonwealth Drive, Menlo Park, CA 94025 (US).  
**STUERZLINGER, Wolfgang [AT/CA]**; 219 Glenforest  
Road, Toronto, Ontario M4N 2A3 (CA). **SEETZEN, Helge [DE/CA]**; 5432 Duquette, Montreal, Québec H4A  
1J6 (CA).

(74) Agent: **MANNING, Gavin, N.; OYEN WIGGS GREEN & MUTALA**, 480 - 601 West Cordova Street, Vancouver, British Columbia V6B 1G1 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: **HIGH DYNAMIC RANGE DISPLAY DEVICES**

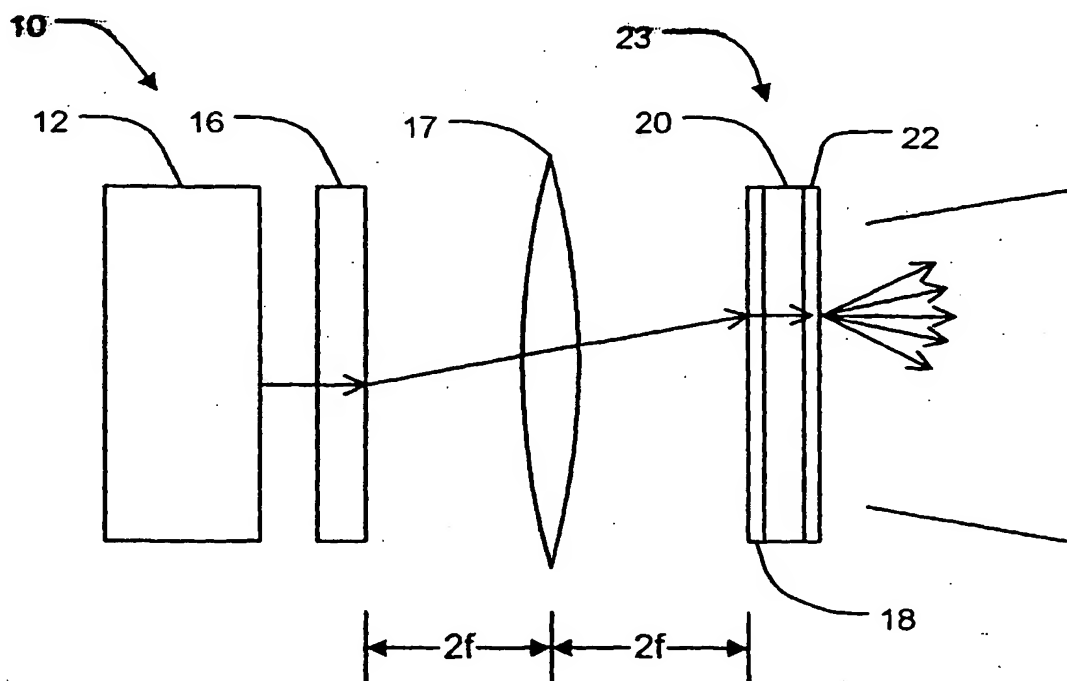

(57) Abstract: A display has a screen which incorporates a light modulator. The screen may be a front projection screen or a rear-projection screen. Elements of the light modulator may be controlled to adjust the intensity of light emanating from corresponding areas on the screen. The display may provide a high dynamic range.

WO 02/069030 A2



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

(48) **Date of publication of this corrected version:**

30 October 2003

(15) **Information about Correction:**

see PCT Gazette No. 44/2003 of 30 October 2003, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069030 A3**

(51) International Patent Classification<sup>7</sup>: **G02F 1/1335**,  
1/1347

(21) International Application Number: **PCT/CA02/00255**

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/271,563 27 February 2001 (27.02.2001) US

(71) Applicant (for all designated States except US): **THE UNIVERSITY OF BRITISH COLUMBIA** [CA/CA];  
Industry Liaison Office, Room 331 IRC Building, 2194  
Health Sciences Building, Vancouver, British Columbia  
V6T 1Z3 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WHITEHEAD, Lorne** [CA/CA]; 3015 W. 12th Avenue, Vancouver, British  
Columbia V6K 2R4 (CA). **WARD, Greg** [US/US]; 149  
Commonwealth Drive, Menlo Park, CA 94025 (US).  
**STUERZLINGER, Wolfgang** [AT/CA]; 219 Glenforest

Road, Toronto, Ontario M4N 2A3 (CA). **SEETZEN, Helge** [DE/CA]; 5432 Duquette, Montreal, Québec H4A  
1J6 (CA).


(74) Agent: **MANNING, Gavin, N.**; OYEN WIGGS GREEN  
& MUTALA, 480 - 601 West Cordova Street, Vancouver,  
British Columbia V6B 1G1 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD,  
SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: HIGH DYNAMIC RANGE DISPLAY DEVICES

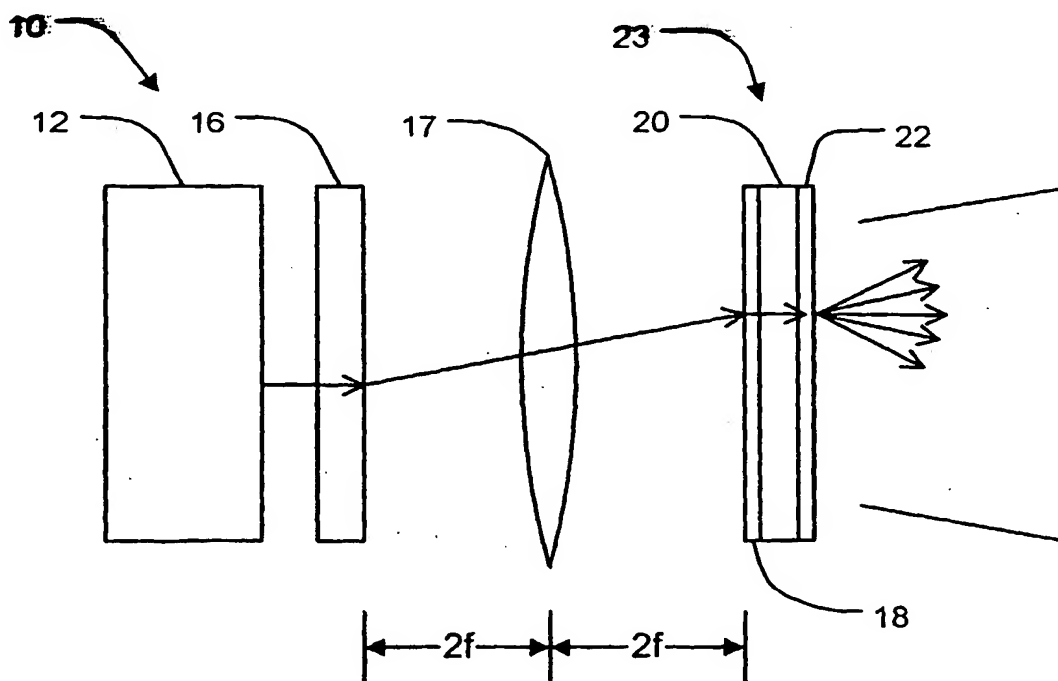

(57) Abstract: A display has a screen which incorporates a light modulator. The screen may be a front projection screen or a rear-projection screen. Elements of the light modulator may be controlled to adjust the intensity of light emanating from corresponding areas on the screen. The display may provide a high dynamic range.

WO 02/069030 A3



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

**Published:**

— *with international search report*

**(88) Date of publication of the international search report:**

11 December 2003

**(15) Information about Correction:**

**Previous Correction:**

see PCT Gazette No. 44/2003 of 30 October 2003, Sec-  
tion II

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 02/00255

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02F1/1335 G02F1/1347

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F G03B G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 978 142 A (BLACKHAM GEOFFREY HOWARD ET AL) 2 November 1999 (1999-11-02) cited in the application column 2, line 40 - column 3, line 51 column 4, line 62 - column 5, line 35 column 6, line 40 - line 47; figures 2,3,9	1-64
A,P	WO 02 03687 A (ADKINS SEAN ;IMAX CORP (CA); ZHOU SAMUEL Z (CA); GIBBON MICHAEL A) 10 January 2002 (2002-01-10) cited in the application page 6, line 3 - line 31; figures 1,2,5,7A-7C,12-14,16 -/-	1-64



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

28 August 2003

Date of mailing of the international search report

11/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Manntz, W

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 02/00255

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 05, 31 May 1999 (1999-05-31) & JP 11 052412 A (SONY CORP), 26 February 1999 (1999-02-26) abstract -& DATABASE WPI Section PQ, Week 199919 Derwent Publications Ltd., London, GB; Class P81, AN 1999-218835 XP002252663 & JP 11 052412 A (SONY CORP), 26 February 1999 (1999-02-26) abstract	1,55,63, 64
A	----- US 4 933 754 A (REED WILLIAM G ET AL) 12 June 1990 (1990-06-12) the whole document	1,55,63, 64
A	----- WO 00 75720 A (UNIV BRITISH COLUMBIA) 14 December 2000 (2000-12-14) the whole document -& US 6 215 920 B1 10 April 2001 (2001-04-10) cited ADP family member	31
A	----- US 4 954 789 A (SAMPSELL JEFFREY B) 4 September 1990 (1990-09-04) cited in the application the whole document -----	53

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 02/00255

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5978142	A	02-11-1999	GB	2317290 A	18-03-1998
			CA	2214863 A1	11-03-1998
			EP	0829747 A1	18-03-1998
WO 0203687	A	10-01-2002	AU	7887001 A	14-01-2002
			CA	2414723 A1	10-01-2002
			EP	1300008 A2	09-04-2003
			WO	0203687 A2	10-01-2002
JP 11052412	A	26-02-1999	NONE		
US 4933754	A	12-06-1990	CA	1306418 C	18-08-1992
			DE	3883918 D1	14-10-1993
			DE	3883918 T2	20-01-1994
			DK	609788 A	04-05-1989
			EP	0315589 A1	10-05-1989
			JP	1166027 A	29-06-1989
WO 0075720	A	14-12-2000	US	6215920 B1	10-04-2001
			AU	4906700 A	28-12-2000
			WO	0075720 A2	14-12-2000
			CA	2371138 A1	14-12-2000
			EP	1188094 A2	20-03-2002
			JP	2003501695 T	14-01-2003
US 4954789	A	04-09-1990	EP	0419853 A2	03-04-1991
			JP	3209208 A	12-09-1991
			KR	179363 B1	01-05-1999

**THIS PAGE BLANK (USPTO)**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**